

HYPRO 435 - 460W TH3G48M

Bifacial Dual Glass
0MBB Half Cell N-type HJT

KEY FEATURES


- Better Shading Tolerance
- Ultra-High Bifacial Factor
- Ultra-High Power Generation
- Most Stable Power Temperature Coefficient
- Lead Technology of Metallization Process
- Excellent Anti-LID & Anti-PID Performance

SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



PERFORMANCE WARRANTY

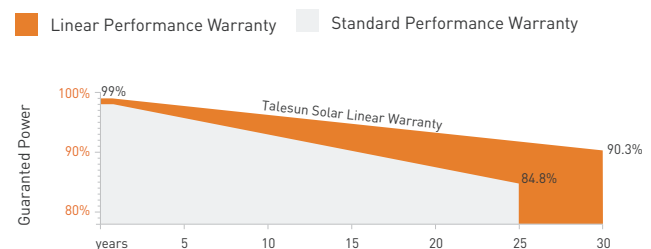

15 Years
Product Warranty

30 Years
Linear Power Warranty

1%
First-year Degradation

0.30 %
Annual Degradation 30 Years

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.